



ETL

FERMEUSE DE BOÎTES ETL 5600

- Fermeuse automatique de boîtes 3 rabats par collage.
- Machine en ligne avec un entraînement des boîtes assuré par chaînes.
- Possibilité de fermer des boîtes cartons de faible grammage jusqu'à de la micro-cannelure.
- Chassis inox
- Collage par générateur de colle hot melt
- Armoire électrique inox intégrée
- Contrôle / Commande par automate programmable.

• Pupitre opérateur

• Alimentation électrique :

- 6,1 kW – 400 V (3ph + N)- 50 Hz
- (autre alimentation sur demande)

• Alimentation pneumatique : 7 bars.

• Dimensions : 4000 x 1800 x 1600 mm

• Poids : 800 Kg


• Machine multi-format : changement de formats par sélection sur pupitre opérateur et par volants avec indicateur numérique de position.

• Cadence :

- Jusqu'à 60 boîtes par minute

• Formats standards de boîte :

- Longueur : 100 – 275mm
- Largeur : 80 – 200mm
- Hauteur : 25 – 80mm



Emballage Technologies

Z.A. de Troyalac'h - CP 19 - 29563 QUIMPER cedex 9 - FRANCE
 Tél. +33 (0)2 98 94 69 99 - Fax : +33 (0)2 98 94 67 59
www.emballage-technologies.com



CLOSING MACHINE

ETL 5600

- Three-flap carton closing machine
- Gating unit to handle carton not in sequence
- Possibility to run low thickness carton as well as corrugated board
- Stainless steel frame
- Gluing by hot melt adhesive
- Integrated electrical cabinet

Power supply :

- 6,1 kW – 400 V (3ph + N)- 50 Hz
- (other supply voltage on request)

Air supply : 5-10 bars.

Dimensions : 4000 x 1800 x 1600 mm

Weight : 800 Kg



Multisize machine : quick change done by handwheel with position information & touchscreen interface

Production rate :

- Up to 60 boxes per minute

Box dimensions :

- Length : 100 - 275mm
- Width : 80 - 200mm
- Height : 25 - 80mm

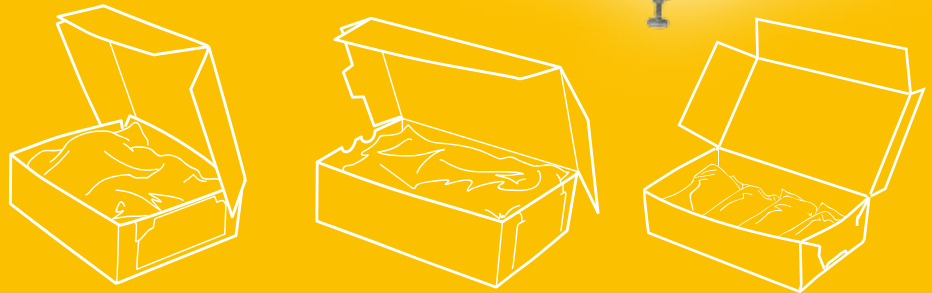

**Emballe
Technologies**

Z.A. de Troyalac'h - CP 19 - 29563 QUIMPER cedex 9 - FRANCE
Tél. +33 (0)2 98 94 69 99 - Fax : +33 (0)2 98 94 67 59
www.emballe-technologies.com



CLOSING MACHINE

ETL S600

- Three-flap carton closing machine
- Gating unit to handle carton not in sequence
- Possibility to run low thickness carton as well as corrugated board
- Stainless steel frame
- Gluing by hot melt adhesive
- Integrated electrical cabinet

Power supply :

- 6,1 kW – 400 V (3ph + N)- 50 Hz
- (other supply voltage on request)

Air supply : 5-10 bars.

Dimensions : 4000 x 1800 x 1600 mm

Weight : 800 Kg


Multisize machine : quick change done by handwheel with position information & touchscreen interface

Production rate :

- Up to 60 boxes per minute

Box dimensions :

- Length : 100 - 275mm
- Width : 80 - 200mm
- Height : 25 - 80mm



ETPACK SPRINTER AB - Industrivägen 4 - SE-302 41 Halmstad - Sweden
Phone: +46 35 161 500 - Fax: +46 35 161 501
www.etpack-sprinter.com